

Backbox SW345

Solid Wall Backbox

DATASHEET V2.2


amina

Product Description

The BackboxSW345 is an easy to install mounting option into solid or block walls/ceilings for Amina Invisible Loudspeakers with the dimensions 345mm x 450mm (Mobius5, Mobius7, MobiusDual).

The Backbox SW345 is a rugged, stainless steel mounting option, incorporating resonance damping, rubber alignment trim and cable entry grommets.

Note, solid wall installation is not suitable for Edge Series speakers.

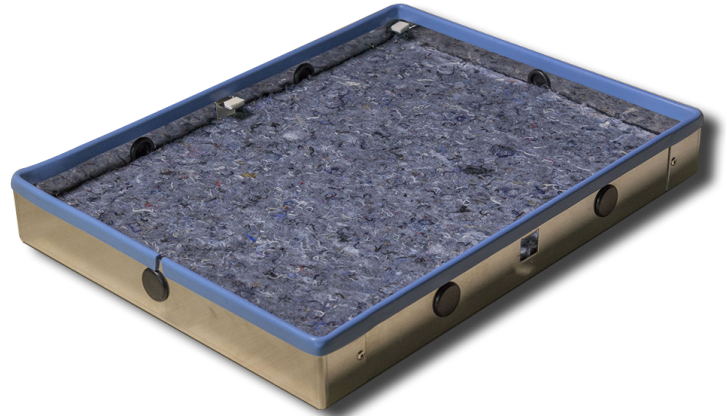

Installation

Designed to be installed early on in the build process, the BackboxSW345 requires an accurate cavity to be created in the solid wall or ceiling, large enough to house the backbox and achieve correct alignment.

Rubber alignment trim should be used to help accurately align the backbox during installation using shims and screws to mechanically secure the backbox in the correct position.

It is essential that the speaker is covered by a maximum 2mm plaster coat once installed. The correct alignment of the backbox will therefore be critical in achieving the correct plaster covering over the speaker.

The front of the alignment trim sits such that it represents the level of the front of the speaker once installed, therefore it can be used to accurately position the backbox and achieve correct speaker alignment.

Alignment trim should be left in place whilst render is applied to the wall, only to be removed immediately prior to speaker installation. Recycled denim insulation should be removed temporarily during render application and re-installed immediately prior to speaker installation. All voids surrounding the BackboxSW should be filled with expanding foam.

Ensure structure is capable of having cavity removed without affecting its integrity before proceeding with any installation work.

Please refer to the installation guide for full information on alignment and installation options.

Specifications

Dimensions

BackboxSW345

464mm x 359mm x 55mm
(18^{9/32}" x 14^{5/32}" x 2^{3/16}")

Weight

2.8Kg (6lbs 3oz)

Required cavity cutout

468mm x 363mm (18^{7/16}" x 14^{5/16}")

Approximate cavity depth

60mm (2^{5/16}")

Speaker cable entry

Rubber grommets

Speaker fixing

4 x self tapping flange-head screws (supplied)

Wall fixing

4 x screws/anchors/wall plugs suitable for the wall/ceiling structure (not supplied)

Amina Technologies Limited

Cirrus House, Glebe Road, Huntingdon, Cambridgeshire, PE29 7DL, England
T: +44 (0) 1480 354390 | E: info@aminasound.com | W: www.aminasound.com