

# Mobius3

Developer series fully-covered invisible loudspeaker

amina

DATASHEET Rev. 1.3 | 01-05-2020 | E&OE

## Product Description


The Mobius3 offers a smaller alternative to the Mobius5i and Mobius7i for use when there is limited stud/joist spacing, or in larger projects such as multi-dwelling units or commercial projects. The Mobius3 can also be used to supplement Mobius speakers within a large project, providing a cost-effective solution for smaller rooms such as spare bedrooms or hallways.

Rendered invisible behind a 2mm skim of plaster or other materials, the Mobius3 uses the same OptiDriver and OptiDamping technology found on the flagship Mobius7i invisible loudspeakers. When paired with a subwoofer the Mobius3 can be used for medium-level full-bandwidth music listening.

## Example Applications

Invisible audio installations with space limitations. Distributed audio and medium-level listening within residential properties such as MDU's. Cost-sensitive commercial background music applications.

## Frequency Response

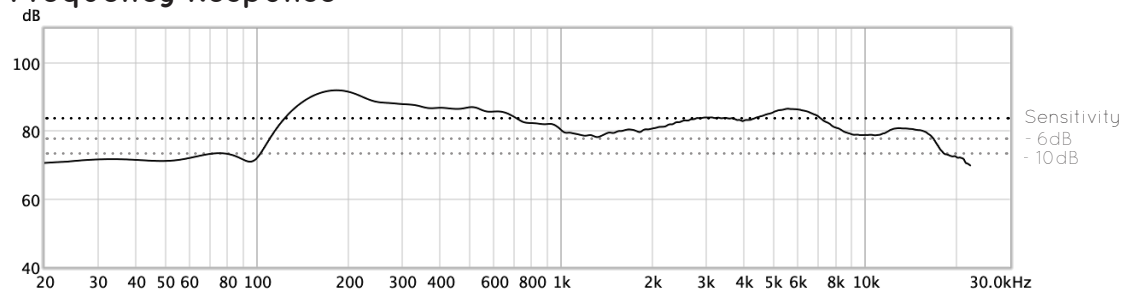

## Specifications

### Mobius3

Nominal impedance	8 Ohms
Power handling (100 hour continuous/peak)	30W/60W
Sensitivity (@ 1m/2.83Vrms)	84dB (with 2mm plaster skim)
Frequency response (-6dB)	112Hz - 20kHz
Useable frequency range (+/- 10dB)	80Hz - 23kHz
Dispersion angle	180° x 180° at specified frequency range
Electrical connection	Blue butt-splice crimp terminals (14-16 AWG)
Dimensions	400mm x 300mm x 35mm (15 <sup>3/4</sup> " x 11 <sup>13/16</sup> " x 1 <sup>3/8</sup> "
Product weight	1.1kg (2lb 6oz)
Fixing requirements	BackboxCV300/SW300 or Mounting Blocks
In-line protection unit	APUi30C, APU-RS8iC or APU-RS16iC
Manufacturer limited warranty	10 years

### Amina Technologies Limited

Cirrus House, Glebe Road, Huntingdon, Cambridgeshire, PE29 7DL, England  
T: +44 (0) 1480 354390 | E: info@aminasound.com | W: www.aminasound.com